




11-17 POWERSCROFT ROAD
SIDCUP, KENT. DA14 5NH
Tel: GB: +44 (0) 208 302 4035
Fax: GB: +44 (0) 208 302 8933

TECHNICAL DATA SHEET MAJESTIC SERIES

MODEL MAJ 822

REAR VIEW

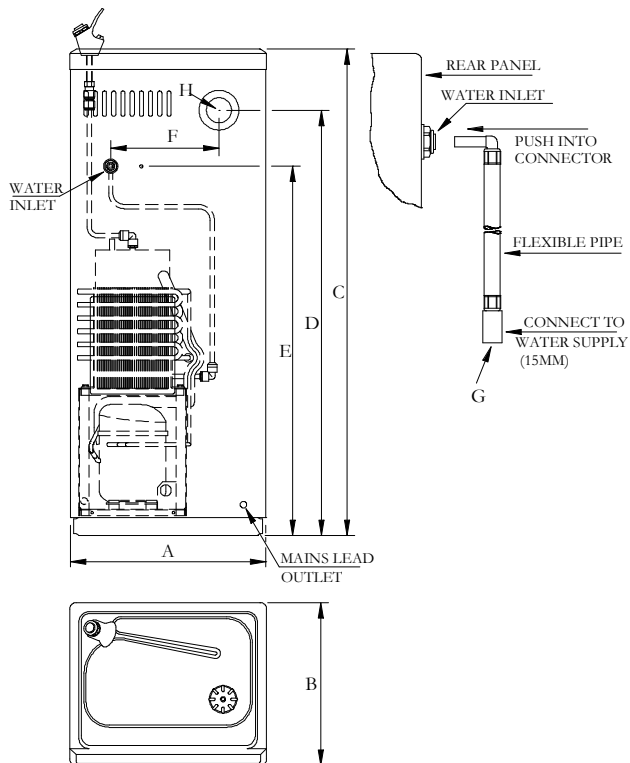

A=385 B=320 C=955 D=840 E=730 F=190
G=Inlet 15mm. H=bottle trap waste multi fit 32mm
(1 1/4")

WATER PRESSURE:

Min 1.4 Bar Max 5.6 Bar
Optimum pressure 2.5 Bar

A regulator should be installed where extreme pressures exist.

*ONLY CONNECT TO **POTABLE** WATER SUPPLY*

REFRIGERATION SYSTEM:

MAESTROPAC® slip-in unit designed for ease of maintenance.

Condenser is fan cooled using a permanently lubricated motor. Hermetically sealed compressor with resetting type overload protector. Capillary controlled with ozone-friendly R134A refrigerant. Manufactured with a removable Maestro pac®.

The Maestro Majestic MAJ 822 water cooler will provide 63 litres/hr of cooled water at 10°C (50°F).

SERVICES:

Electrical: 220V, AC 50Hz 1ph. AC

PLUMBING:

A flexible hose is supplied to connect machine to water supply allowing easy access for maintenance.

CONNECT TO POTABLE WATER SUPPLY ONLY

Hose end fitting is 15mm. plain.

A 32mm multi-fit waste trap outlet is fitted.

A stopcock should be fitted to the supply line.

Prior to installing the machine ensure mains water supply pipe is thoroughly flushed.

THERMOSTAT SETTING:

Recommended 8°C ± 2°C

INSTALLATION:

For best performance, avoid placing in direct sunlight or immediately adjacent to heating appliance. Allow 100mm airspace around unit for adequate ventilation.

This product is supplied with a separate anti-flood device which must be fitted by the installer.

CAUTION:

UNIT **NOT** TO BE USED IN OPEN AIR, EXPOSED TO RAIN, IN HIGH HUMIDITY OR WET AREAS I.E. BY SWIMMING POOLS, SHOWERS OR SAUNAS .

IMPORTANT:

Unit should be in an upright position for 24 hours prior to being switched on.

PACKAGING:

Dimensions: 1140 x 415 x 385 mm

Weight: 45 kgs.

VALVE DETAILS OVERLEAF



Specification subject to change without notice

