


Maestro

MAESTRO Pressure Coolers

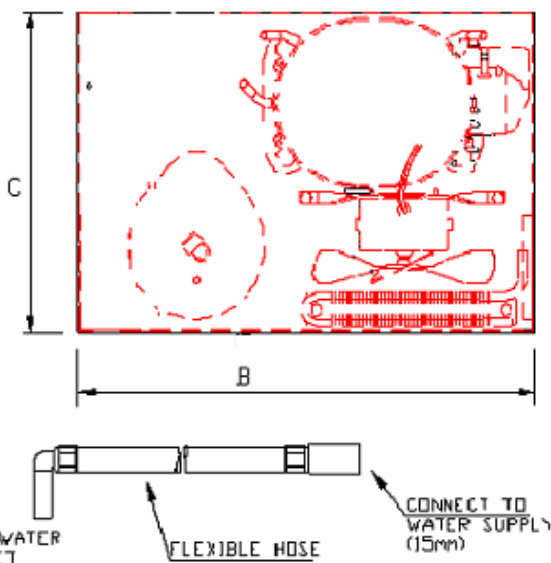
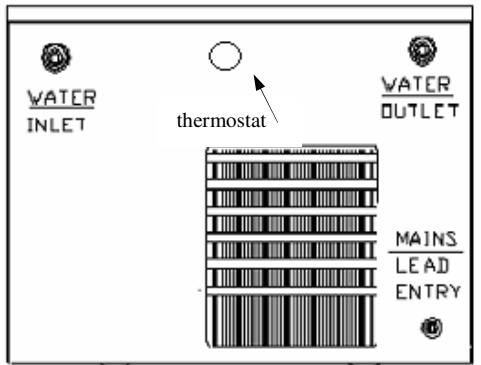
11/17 Powerscroft Road, Sidcup Kent DA14 5NH

Telephone: 020 8302 4035 Fax: 020 8302 8933

 E-mail: info@maestrointl.co.uk

 Website: www.maestrointl.co.uk
Water Coolers * Drinking Fountains * Bottled Water Deliveries * Accessories * Sanitization

Model HH236


A=310 B=355 C=350

OPTIMUM WATER PRESSURE:

2.6 Bar

Min 1.4 Bar

Max 5.6 Bar

A regulator should be installed where extreme pressures exist.

REFRIGERATION SYSTEM:

Condenser is fan cooled using a permanently lubricated motor. High torque capacitor start hermetically sealed compressor with resetting type overload protector. Capillary controlled with ozone-friendly R134A refrigerant. Manufactured with a fixed Maestro pac®.

TECHNICAL DATA SHEET HIDE-AWAY SERIES

The Maestro HH236 water cooler will provide 26.4 litres/hr of cooled water at 10°C (50°F). Supplied with glass filler and 1 metre inlet hose.

ELECTRICAL:

220/240V, AC 50Hz single phase

FLA: 1.6A

LRA: 5A

PLUMBING:

A flexible hose is supplied to connect machine to water supply allowing easy access for maintenance. Hose end fitting is 15mm. plain.

A stop cock should be fitted to the supply line.

Prior to installing the machine ensure mains water supply pipe is thoroughly flushed.

Connect to potable water supply only.

THERMOSTAT SETTING:

Factory set 8°C ± 2°C - adjustable

INSTALLATION:

For best performance, avoid placing in direct sunlight or immediately adjacent to heating appliance. Allow 100mm airspace around unit for adequate ventilation.

Where units require to be placed in confined areas, airflow should be achieved by providing air vents – ideally above and below the units. This is additional to the 100 mm requirement.

We recommend that an anti-flood device should be fitted by the installer, available from Maestro as an option.

CAUTION:

UNIT NOT TO BE USED IN OPEN AIR, EXPOSED TO RAIN, IN HIGH HUMIDITY OR WET AREAS SUCH AS NEAR SWIMMING POOLS OR SAUNAS. UNIT SHOULD BE IN AN UPRIGHT POSITION FOR 24 HOURS PRIOR TO BEING SWITCHED ON.

PACKAGING

Dimensions: 540 x 380 x 380 mm

Weight: 17 kgs

Specification subject to change without notice.