


Maestro

MAESTRO Pressure Coolers


11/17 Powerscroft Road Sidcup DA14 5NH

Telephone: 020 8302 4035 Fax: 020 8302 8933

 E-mail: info@maestrintl.co.uk

 Website: www.maestrintl.co.uk
Water Coolers * Drinking Fountain * Bottled Water Deliveries * Accessories * Sanitization

Model WJ260

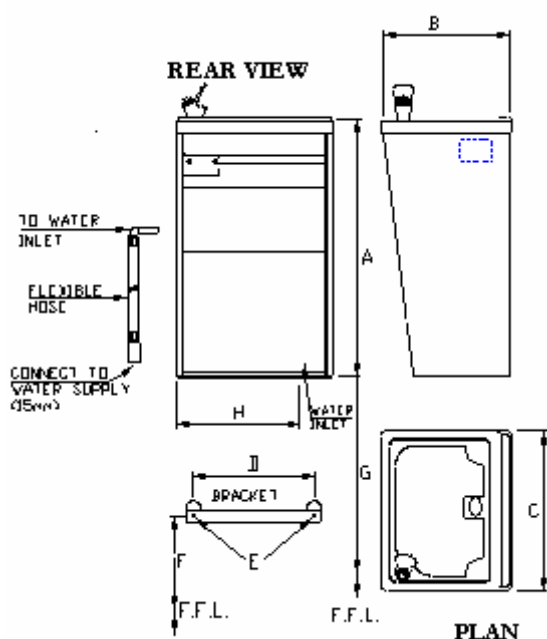

A = 615mm B = 334mm C = 380mm
 D = 315mm E = 10mm dia
 F = 870mm G = 410mm

WATER SYSTEM:

Insulated tank with two membranes of metal between refrigerant and water systems.

OPTIMUM WATER PRESSURE

2.6 Bar

Min 1.4 Bar Max 5.6 Bar

A regulator should be installed where extreme pressures exist.

REFRIGERATION SYSTEM:

Condenser is fan cooled using a permanently lubricated motor. Hermetically sealed compressor with resetting type overload protector. Capillary controlled with ozone-friendly R134A refrigerant. Manufactured with a fixed Maestro pac®.

IMPORTANT:

Unit should be in an upright position for 24 hours prior to being switched on.



TECHNICAL DATA SHEET WALL-MOUNTED SERIES

Model WJ260 water cooler will provide 27 litres per hour of cooled water at 10°C (50°F).

ELECTRICAL:

230V, AC 50Hz 1ph

FLA: 1.6A LRA: 11.8A

PLUMBING:

A flexible hose is supplied to connect machine to water supply allowing easy access for maintenance.

Hose end fitting is 15 mm plain.

A 32mm multi-fit waste trap outlet is supplied.

A stop cock should be fitted to the supply line.

Prior to installing the machine ensure mains water supply is thoroughly flushed.

Connect to potable water supply only.

THERMOSTAT SETTING:

Factory set at 8°C ± 2°C - adjustable

INSTALLATION:

For best performance, avoid placing in direct sunlight or immediately adjacent to heating appliances. Allow 100mm airspace around unit for adequate ventilation.

We recommend that an anti-flood device should be fitted by the installer, available from Maestro as an option.

CAUTION:

UNIT **NOT** TO BE USED IN OPEN AIR, EXPOSED TO RAIN, IN HIGH HUMIDITY OR WET AREAS. IE: BY SWIMMING POOLS, SHOWERS OR SAUNAS ETC.

PACKAGING:

Dimension: 820 x 415 x 380 mm

Weight: 25 kgs

Specifications subject to change without notice.

